



RTI/RTM High Capacity Cord Reels

High Amperage and High Cord Capacity Retractable Power Cord Reels

Built to NEMA 4 standards for indoor and outdoor use, including wet locations.



RTIK3L-WW-B12U

APPLICATIONS

- Utility Maintenance Vehicles
- Manufacturing
- Cranes
- Construction

FEATURES

- 35 to 150 Amp/600 VAC rated slip ring
- Heavy-duty formed steel stand
- Adjustable roller guide arm included; 12 possible positions
- Low friction, four-roller cord guide
- Yellow powder-coat finish
- Positive lock or constant-tension
- Lifetime lubricated motor
- Ratchet included
- Flying leads with threaded NPT connection on feed side

OPTIONS

- Up to 110 Amps
- 2 - 20 Conductors
- 16 - 2 AWG
- Optional ball stop
- Holds up to 150' of SOOW
- Motorized options




All cord reels listed are designed for lift or drag application, ie: ceiling mounted. Please contact us if your cord is being attached to moving machinery or if it will be suspended horizontally in the air.

Model No.	Cord Length	Gauge/Conductor	Cord Type	Max Amps	Reel Color
RTIA3L-WW-B14U	100'	14/3	SOOW	15	Yellow
RTIA4L-WW-B14U		14/4		12	
RTIK3L-WW-B12U		12/3		20	
RTIL4L-WW-B12U		12/4		16	
RTIL3L-WW-B10U		10/3		25	
RTIL4L-WW-B10U		10/4		20	
RTMR4L-WW-K8O	70'	8/4	SOOW	45	
RTID4L-WW-K8G	30'				
RTMH4L-WW-K6K	50'			6/4	55

Additional cord reels are available, including motorized, retrieve cord reels, and cord reels for specialty applications. Please contact KH Industries for more information.

Specifications

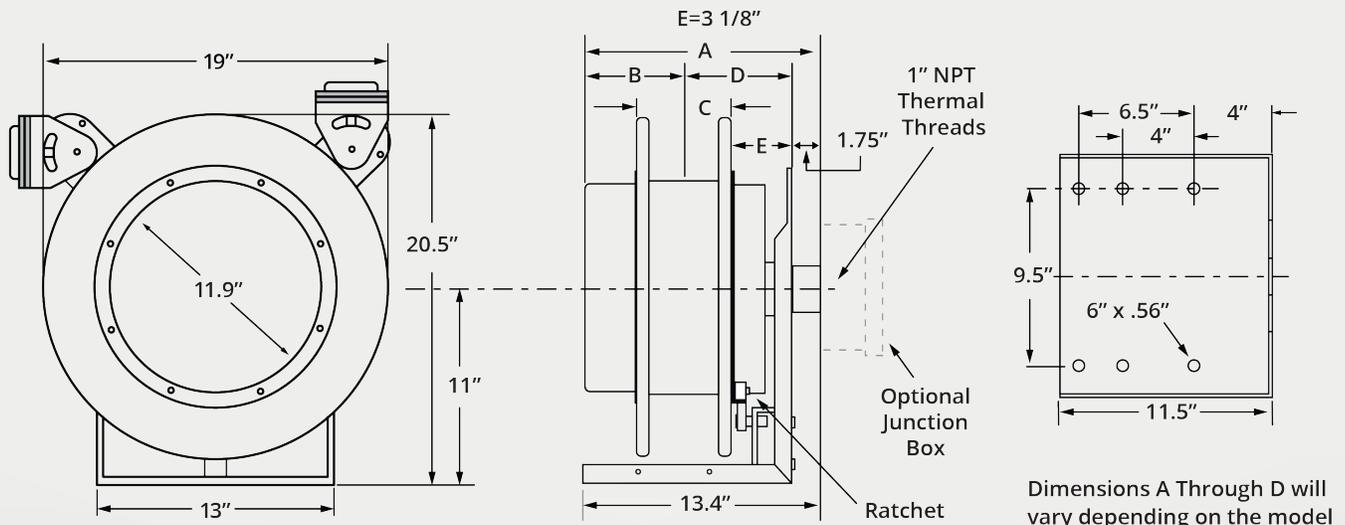

Dimensions A Through D will vary depending on the model

E= 3 1/8" to 4 1/8" depending on the model

Width: RTI 19" RTM 24"

